

**K.A. Alibayeva*, M.S. Tungatarova*, A.Zh. Bibossinov*,
A.B. Kuljabekov*, A. Kaltayev***

STUDY OF URANIUM EXTRACTION PROCESS BY THE *IN-SITU* LEACHING METHOD

In-situ leaching is a method for development of ore deposits without lifting the ore to the surface by selective transfer of ions of natural uranium into productive solution in sub-surface. This method is realized by drilling wells through the ore deposit, pumping into leaching solution and metal-laden solution pumped back to the surface, and is extracted in a processing plant. The refine solution after addition solute component sends to the underground by injecting well, as illustrated in Figure 1.

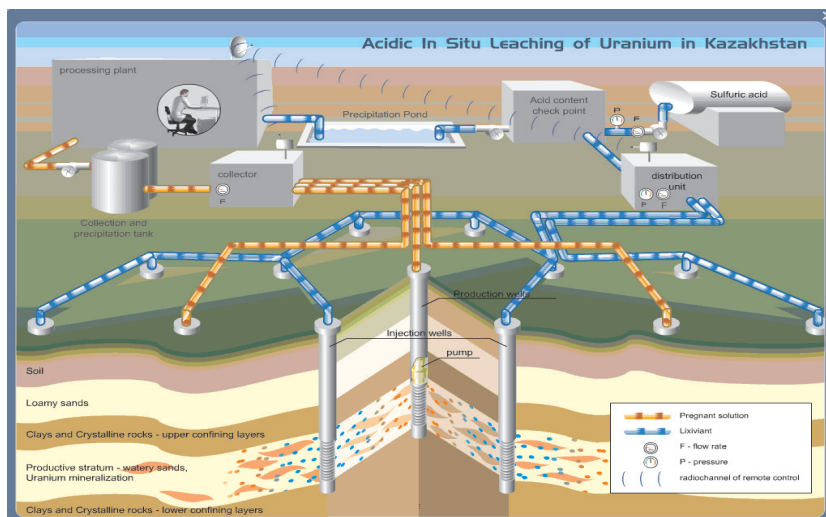


Fig. 1. Pictorial representation of the ISL process

* Al-Farabi Kazakh National University, Almaty, Kazakhstan

There are two main options for the leaching chemistry – acid or alkaline solutions. In general, acid solutions (such as sulfuric acid) will extract a higher proportion of uranium and at faster rates than alkaline solutions (such as sodium or ammonia bicarbonate). Solution of sulfuric acid and salt carbonate of ammonium, sodium, calcium are used as a reagent during the uranium mining. All uranium deposits in Kazakhstan are mining by in-situ leach method using sulfuric acid solution.

Under oxidizing conditions uranium exists in a highly soluble form, U^{6+} (as ion with a positive charge of 6), and is therefore very mobile. However under reducing conditions it converts to an insoluble form, U^{4+} , and is precipitated.

Governing reaction describing of uranium leaching process by sulfuric acid solution in schematic form [1, 2]



Transfer reaction of useful element from solid phase to liquid phase is produced as

$$v_m M + v_r R = v_p P + v_w W \quad (2)$$

where:

- M – gram-molecule of mineral (uranium) in solid phase,
- R – gram-molecule of reagent (sulfuric acid),
- P – gram-molecule of useful element of dissolved uranium,
- W – gram-molecule of by-product in liquid phase (ex., water),
- v_r, v_m, v_p, v_w – stoichiometric coefficient of reagent, mineral, useful element and water, respectively.

The system of equations is considered with following conditions: the medium is homogeneous and isotropic, the density of solution and layer are constant, and solution flow on the layer border doesn't exist. Then these processes are described by following equations using Darcy law and conservation law

$$\operatorname{div}(K \operatorname{grad} H) + \sum_{i=1}^{nw} q_{si} \delta(\vec{x} - \vec{x}_i) = 0 \quad (3)$$

$$\vec{V} = -K \operatorname{grad} H \quad (4)$$

$$\frac{\partial \bar{C}_m}{\partial t} = -\gamma \epsilon C_R^0 \bar{C}_m \bar{C}_r \quad (5)$$

$$\begin{aligned} \frac{\partial \epsilon \bar{C}_r}{\partial t} = & \operatorname{div}(\epsilon D \operatorname{grad} \bar{C}_r - \vec{V} \bar{C}_r) - v_1 \gamma \epsilon C_m^0 \bar{C}_m \bar{C}_r - \\ & - \sum_d q \delta(x_d, y_d, z) \bar{C}_r + \sum_p q \delta(x - x_{0p}, y - y_0, z) \end{aligned} \quad (6)$$

$$\begin{aligned} \frac{\partial \varepsilon \bar{C}_p}{\partial t} = \operatorname{div}(\varepsilon D \operatorname{grad} \bar{C}_p - \bar{V} \bar{C}_p) + v_1 \gamma \varepsilon C_m^0 \bar{C}_m \bar{C}_r - \\ - \sum_p q \delta(x - x_{0p}, y - y_0, z) \bar{C}_p \end{aligned} \quad (7)$$

where

$$\bar{C}_m = \frac{C_m}{C_m^0}, \quad \bar{C}_r = \frac{C_r}{C_r^0}, \quad \bar{C}_p = \frac{C_p v_1}{C_r^0 v_2}$$

$$v_1 = v_r R / v_m M, \quad v_2 = v_p P / v_m M,$$

here:

C_m – concentration of uranium in solid phase,

C_m^0 – initial content of mineral in layer,

C_r – concentration of sulfuric acid in solution,

C_r^0 – concentration of reagent on producing well,

C_p – concentration of useful element (uranium) in solution,

$\bar{V}$ – filtration rate,

q – debit of well ($q_d < 0$ for producing well, $q_p > 0$ for inject well),

ε – porosity of layer,

γ – coefficient, characterizing reaction rate,

$D_{i,j}$ – hydrodynamic dispersion coefficient, defined as:

$$\left\{ \begin{aligned} D_{xx} &= \frac{\alpha_l u^2}{|V|} + \frac{\alpha_t v^2}{|V|} + D^*, \\ D_{yy} &= \frac{\alpha_l v^2}{|V|} + \frac{\alpha_t u^2}{|V|} + D^*, \\ D_{xy} &= (\alpha_l - \alpha_t) \frac{u v}{|V|} + D^*. \end{aligned} \right. \quad (8)$$

where:

α_L – longitudinal dispersive,

α_T – transverse dispersive.

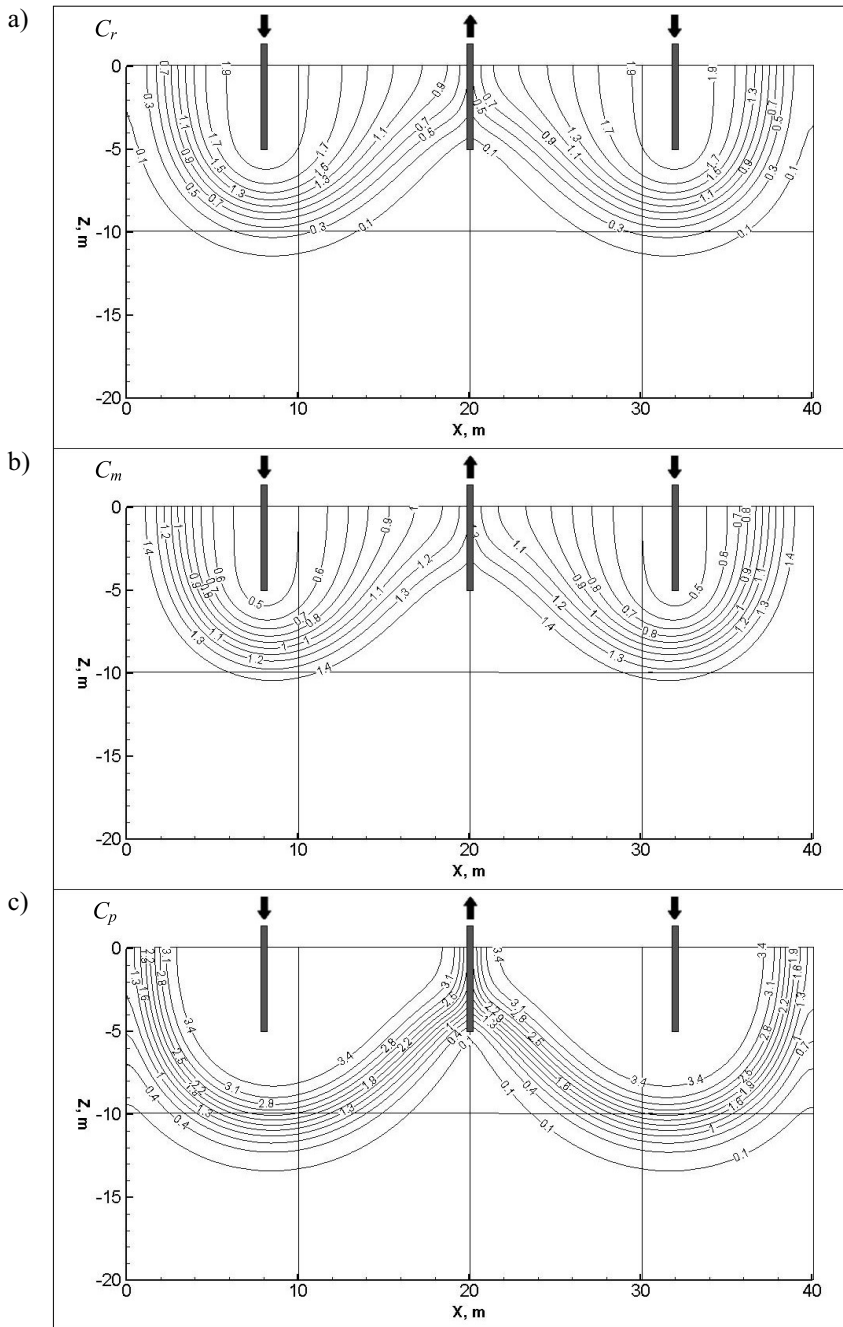


Fig. 4. Concentration isoline: a) reagent; b) useful component in solid phase; c) useful component in fluid phase, in layer at $t = 100$ day (vertical section along the well)

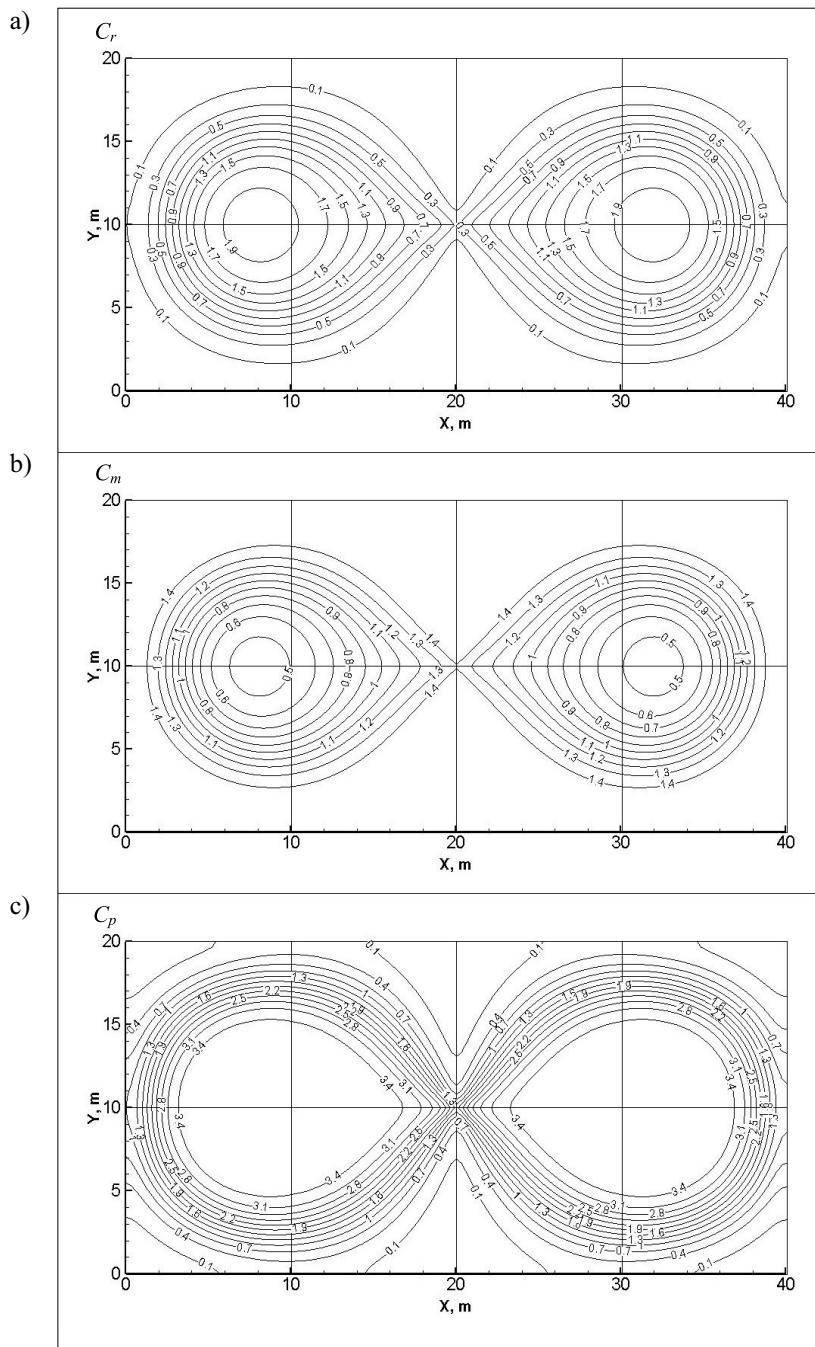


Fig. 5. Concentration isoline: a) reagent; b) useful component in solid phase; c) useful component in fluid phase, in layer at $t = 100$ day (horizontal section on 3 m depth)

Mathematical and numerical models have been considered in this work and computational program for calculation uranium mining process by in-situ leach method is elaborated. Distribution of hydro dynamical pressure, velocity field, distribution of uranium concentration in layer, reagent concentration and useful element concentration in product solution are obtained (Figs. 3–5). The results show that filtration of solution practically doesn't exist in the distance from wells. And so-called stagnant zone is appearing, which brings into decrease of excavation level. ISL can also be applied to other minerals such as copper and gold.

REFERENCES

- [1] Mamilov V.A.: *Uranium extraction by in-situ leach method*. Moscow: Atomizdat, 1980, 248
- [2] MT3DMS: *A Modular Three-Dimensional Multispecies Transport Model for Simulation of Advection, Dispersion, and Chemical Reaction of Contaminants in Ground-water Systems*. Documentation and User's Guide / by Chunmiao Zheng, P. Patrick Wang. Department of Geological Sciences, University of Alabama, 1999, p. 160
- [3] Rouch P.: *Computational hydrodynamics*. Moscow, Mir. 1980, 616
- [4] Flecher K.: *Numerical methods in fluid dynamics*. Moscow, Mir, vol. 1, 2, 1991 – 552