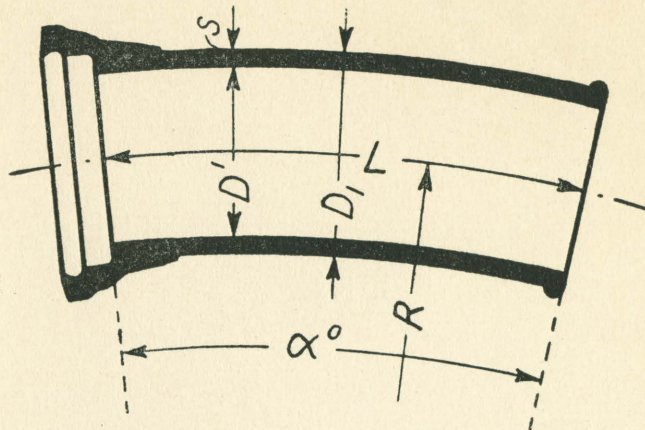


Żeliwne rury wodociągowe

Łuk kielichowy

PN
B-808

Milimetry

Średnica nominalna D	D'	s	D ₁	L	R	α°	Waga kg
40	37	9,5	56	500	500	57°27'	8
40	37	9,5	56	500	1000	28°43'	8
50	47	9,5	66	500	500	57°27'	10
50	47	9,5	66	500	1000	28°43'	10
80	76	11	98	1000	1250	45°50'	27
80	76	11	98	1000	2500	22°55'	27
80	76	11	98	1000	5000	11°28'	27
100	96	11	118	1000	1250	45°50'	33
100	96	11	118	1000	2500	22°55'	33
100	96	11	118	1000	5000	11°28'	33
125	121	12	145	1000	1250	45°50'	44
125	121	12	145	1000	2500	22°55'	44
125	121	12	145	1000	5000	11°28'	44
150	146	12	170	1000	1250	45°50'	53
150	146	12	170	1000	2500	22°55'	53
150	146	12	170	1000	5000	11°28'	53
200	196	13	222	1000	2500	22°55'	75
200	196	13	222	1000	5000	11°28'	75
250	245	14,5	274	1000	2500	22°55'	105
250	245	14,5	274	1000	5000	11°28'	105
300	295	15,5	326	1000	2500	23°30'	130
300	295	15,5	326	1000	5000	11°28'	130
350	344	17	378	1500	2500	34°23'	240
350	344	17	378	1500	5000	17°11'	240
400	394	18	430	1500	2500	34°23'	290
400	394	18	430	1500	5000	17°11'	290
400	394	18	430	1500	10000	8°35'	290
500	494	19	532	1750	5000	20°3'	440
500	494	19	532	1750	10000	10°2'	440
600	593	21,5	636	1750	5000	20°3'	600
600	593	21,5	636	1750	10000	10°2'	600
700	692	24	740	1750	5000	20°3'	770
700	692	24	740	1750	10000	10°2'	770
800	791	26,5	844	1750	5000	20°3'	980
800	791	26,5	844	1750	10000	10°2'	980
900	890	29	948	1750	5000	20°3'	1210
900	890	29	948	1750	10000	10°2'	1210
1000	990	31	1052	1750	5000	20°3'	1440
1000	990	31	1052	1750	10000	10°2'	1440
1200	1188	36	1260	1750	5000	20°2'	2020
1200	1188	36	1260	1750	10000	10°2'	2020

Uwaga: Wymiary kielicha patrz B—803.

Październik 1926

NZB/N 2031